




# Logitech Webcam Pro 9000 USB Connection Replacement

Written By: Cory Davis



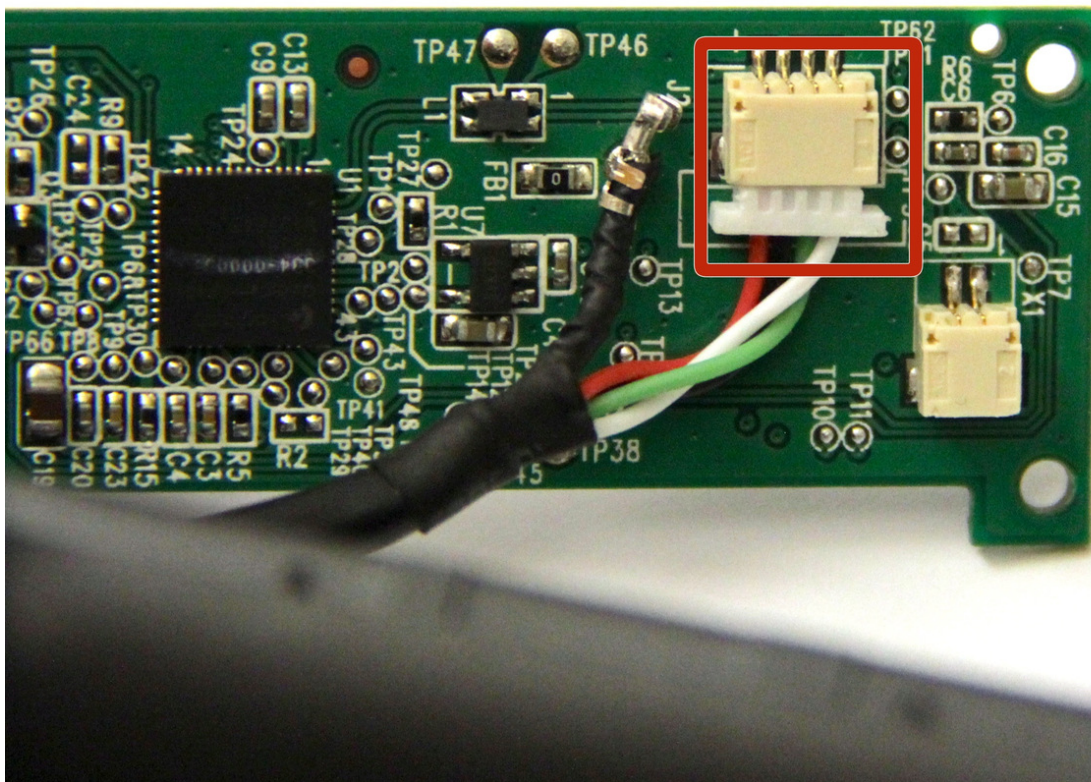

## TOOLS:

- [Soldering Workstation](#) (1)
  - [Desoldering Braid](#) (1)
  - [Spudger](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Front and Back Cover





- Remove the two 8mm Phillips#0 screws on the back cover.

⚠ The motherboard is attaching the two covers together, so don't separate them entirely just yet.

ⓘ There is a button that loosens as the Phillips screws are removed. Don't be alarmed if it falls out.



## Step 2

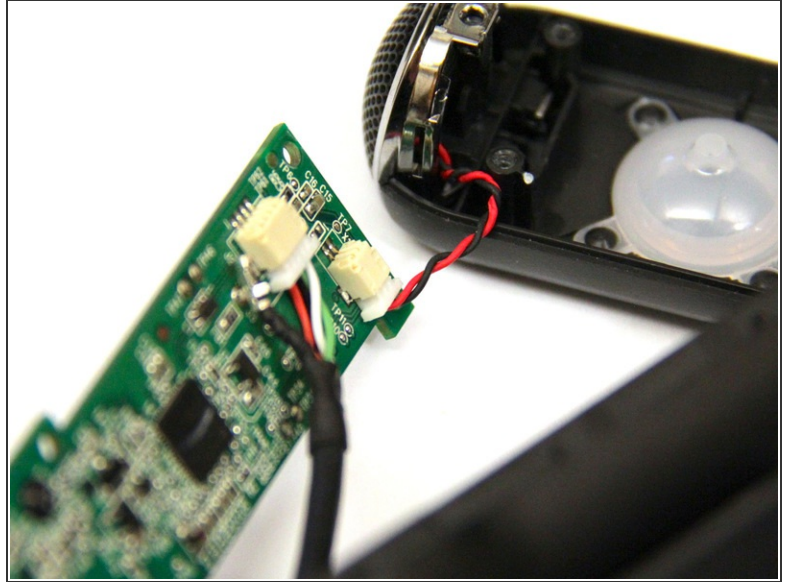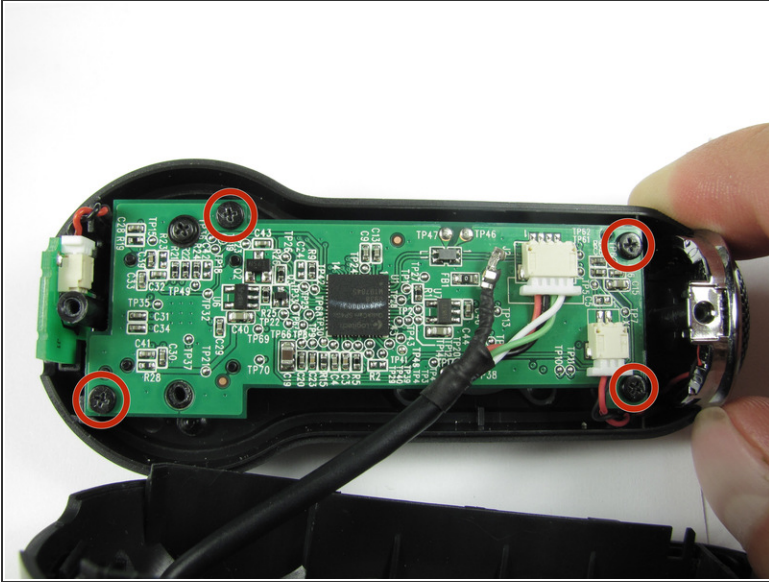

- Remove the four 6mm Phillips#0 screws connecting the motherboard and front cover.

⚠ **DO NOT** detach the wire connecting the motherboard to the front cover.



## Step 3 — USB Connection

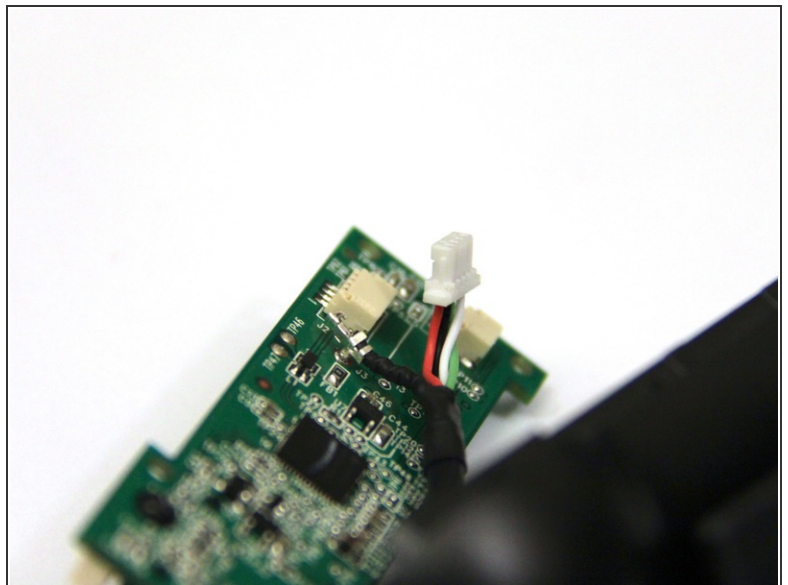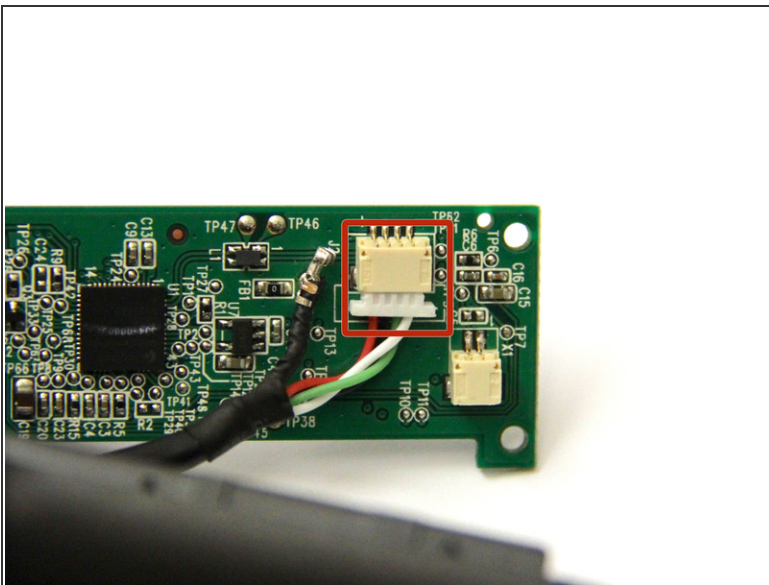

- Grasp the white wire connector on the back of the motherboard to remove the USB cable.
- Wiggle the connector back and forth to remove it from the socket.



## Step 4

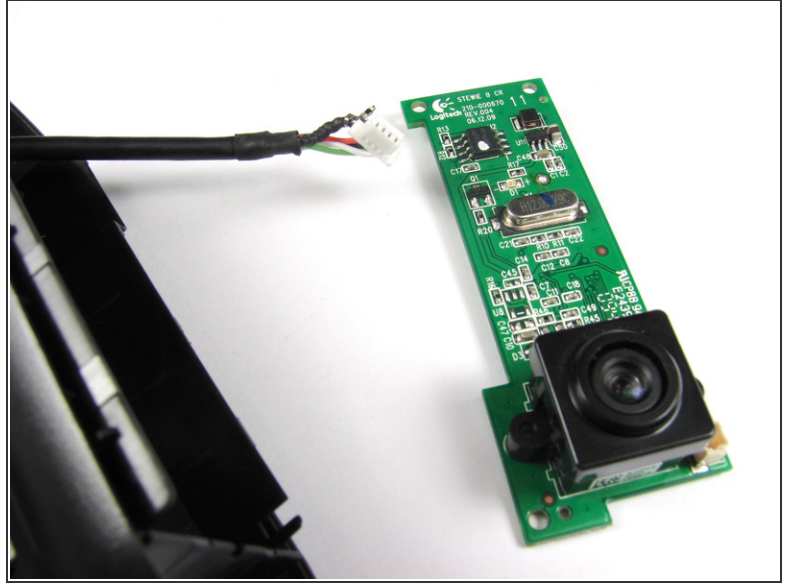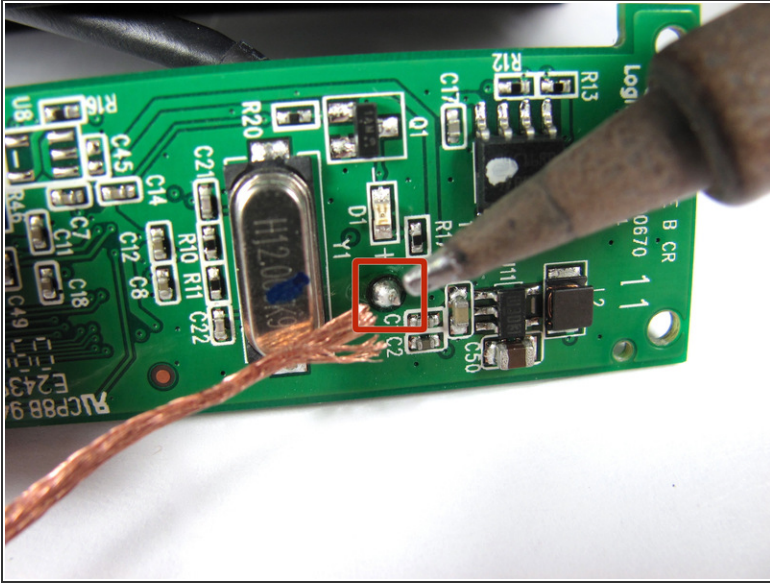

- Desolder the joint on the front of the motherboard to completely detach the USB cable.

 Follow this [link](#) to learn how to properly solder and desolder your parts.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 09:11:54 AM.